



Masoneilan

Specification Data
CM36005
03/08

36005 Series V-Max

High Capacity V-Ported
Control Ball Valve

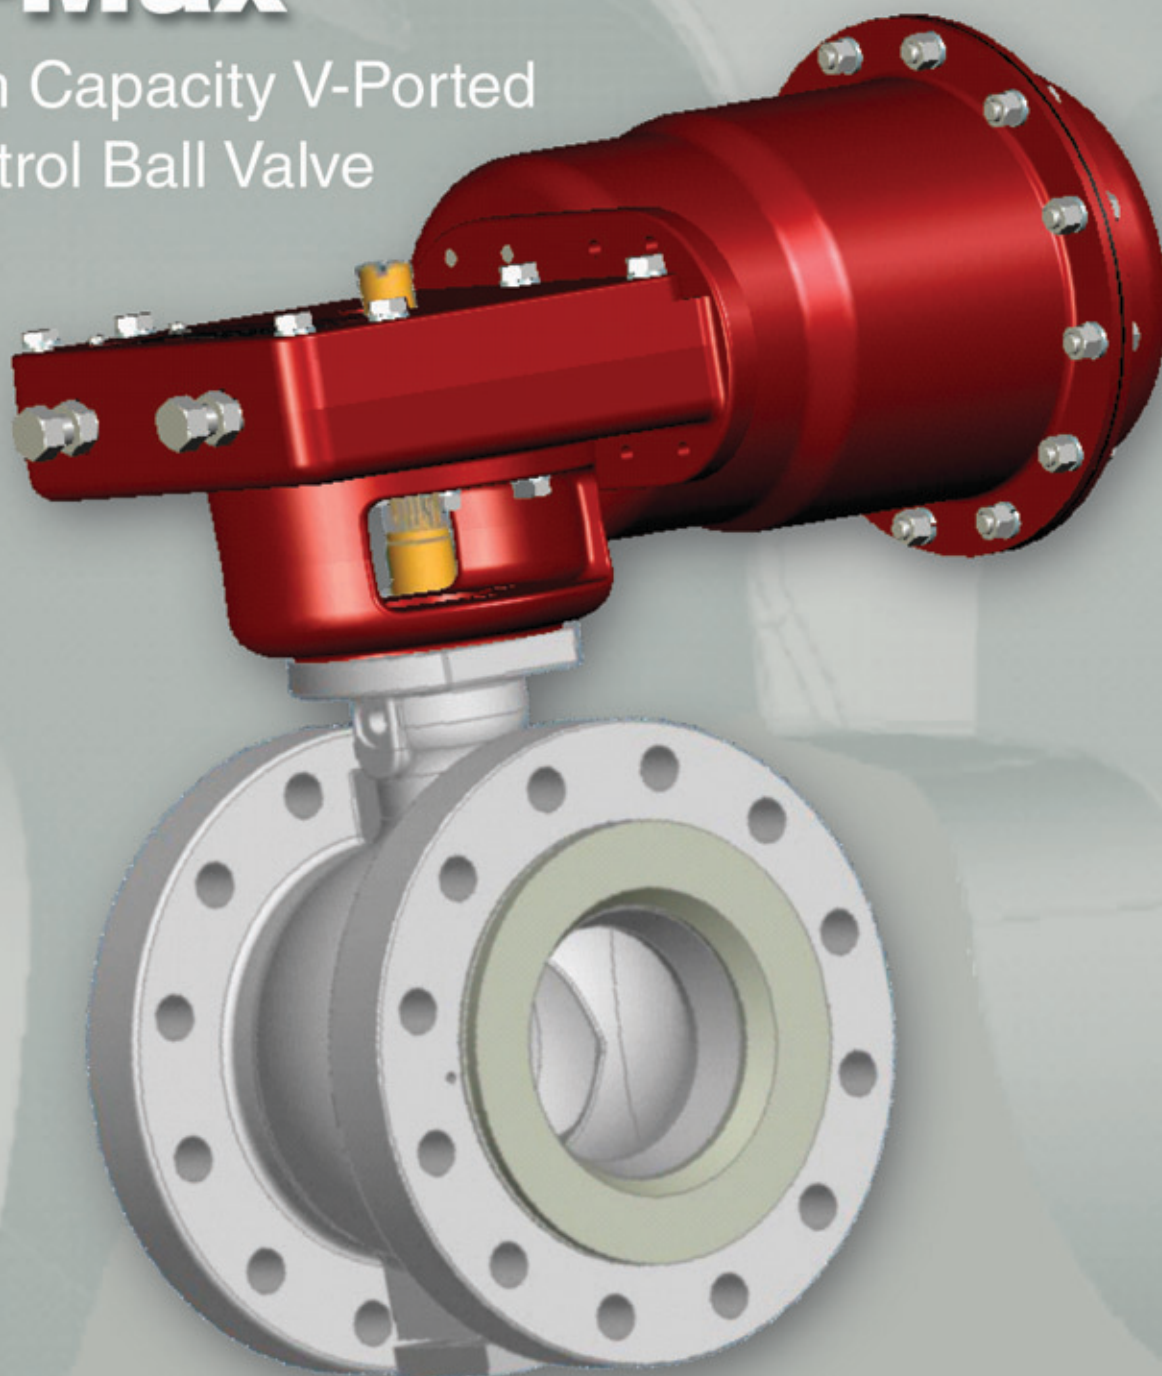



Table of Contents

Foreword	2
Numbering System	3
Actuator Mounting Guide	4
General Data	6
Seal Ring Temperature Limits.....	8
C _v and F _L vs Travel	9
Materials of Construction	10
Dimensions and Weights	14

Foreword

The V-Max® is a high capacity, heavy duty automatic throttling control ball valve incorporating the following features:

- Integrally cast ANSI 150 or 300 class raised face flanges. Eliminates long tie rods and simplifies alignment.
- Installation flexibility – Two face to face dimensions are available. Standard construction is in accordance with ISA S75.04 and IEC 534-3-2. Also available in ANSI B16.10 short pattern face to face dimensions – ANSI class 150 only.
- Straight through flow pattern provides exceptional capacities.
- Patented dual-characterized V-port ball combines an equal percentage flow characteristic with high capacities and greater than 500:1 rangeability.




- Standard EF Seal (Emission Free) packing system provides long term, zero leakage† shaft sealing performance.
- MN-7 low-friction polymeric seal ring provides reliable Class VI shutoff.

- 316 Stainless Steel seal ring for Class IV shutoff and higher temperature capability when combined with satellite bearings and flexible graphite packing. Unique seal design requires no shims.
- Heavy Duty Seat provides longer service life in harsher applications. The wiping action of the seal ring against the ball prevents build up of contaminants maintaining long-term performance and reliable Class IV shutoff.
- Full involute spline connections on plug, shaft and actuator connections virtually eliminate backlash, providing reliable operation and ease of maintenance.
- Easy maintenance – The seal ring may be changed by simply removing two machine screws on the inlet flange. Actuator removal or complete valve disassembly is not required.

† Factory Mutual certified report

Numbering System

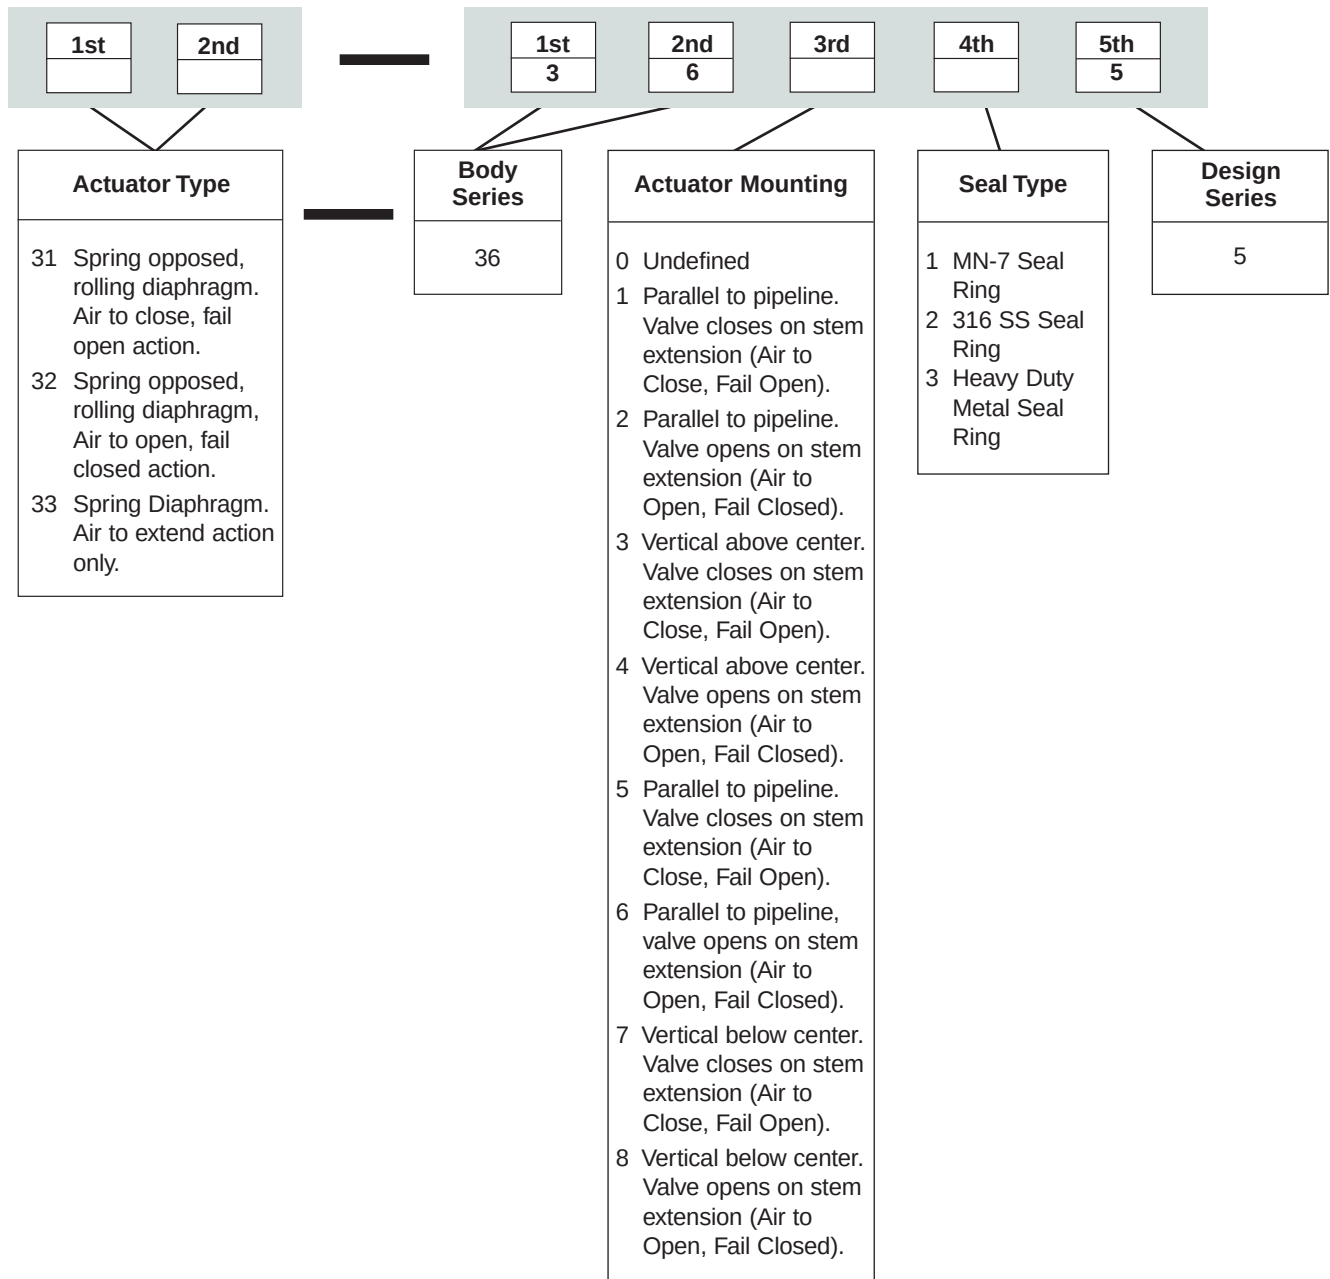

Note:

Actuator sizes B and C are only supplied in positions 3, 4, 7 or 8.


Actuator Mounting Guide

V-Max Valves


3 X - 3 6 X 0 5

Actuator position in Relation to Valve Body
Numbering System: 1 to 8

Actuator Model 33, Size AC

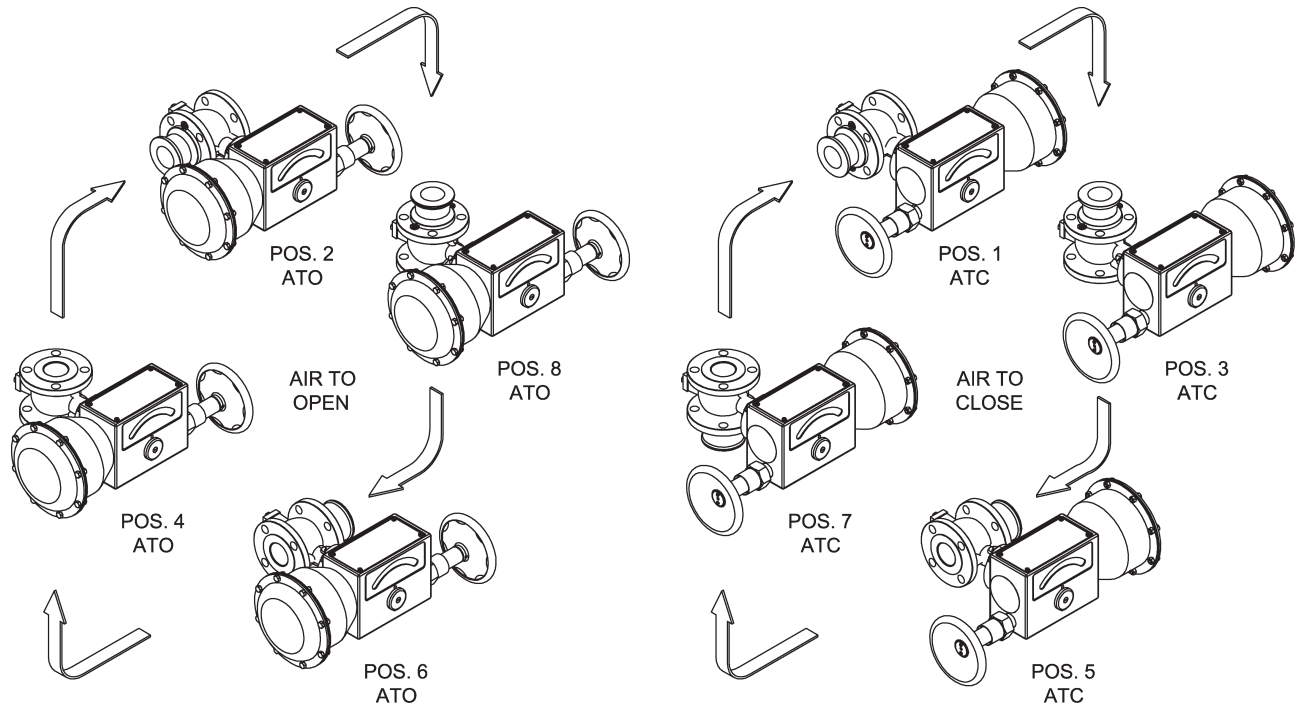

Actuator Model 33, Sizes B and C

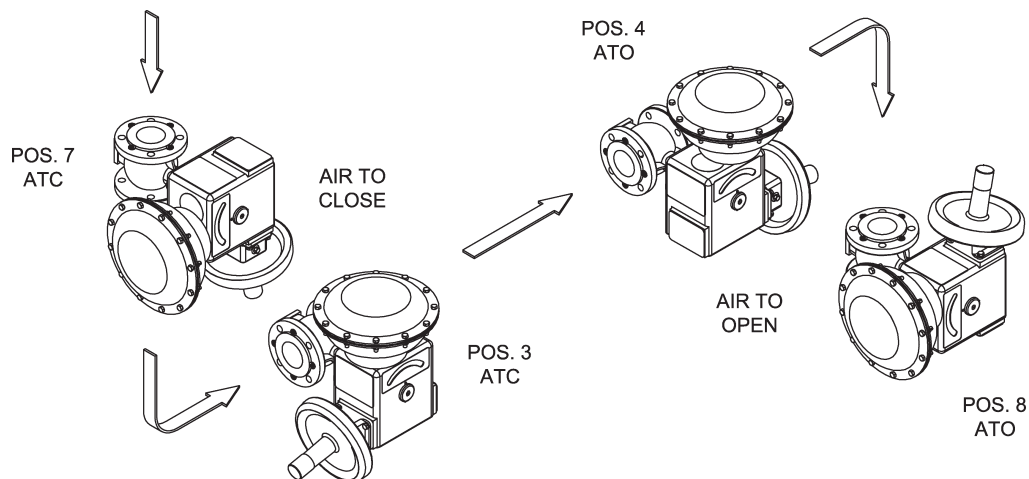


Actuator Mounting Guide

V-Max Valves

3 X - 3 6 X 0 5

Actuator position in Relation to Valve Body
Numbering System: 1 to 8

Actuator Models 31 & 32

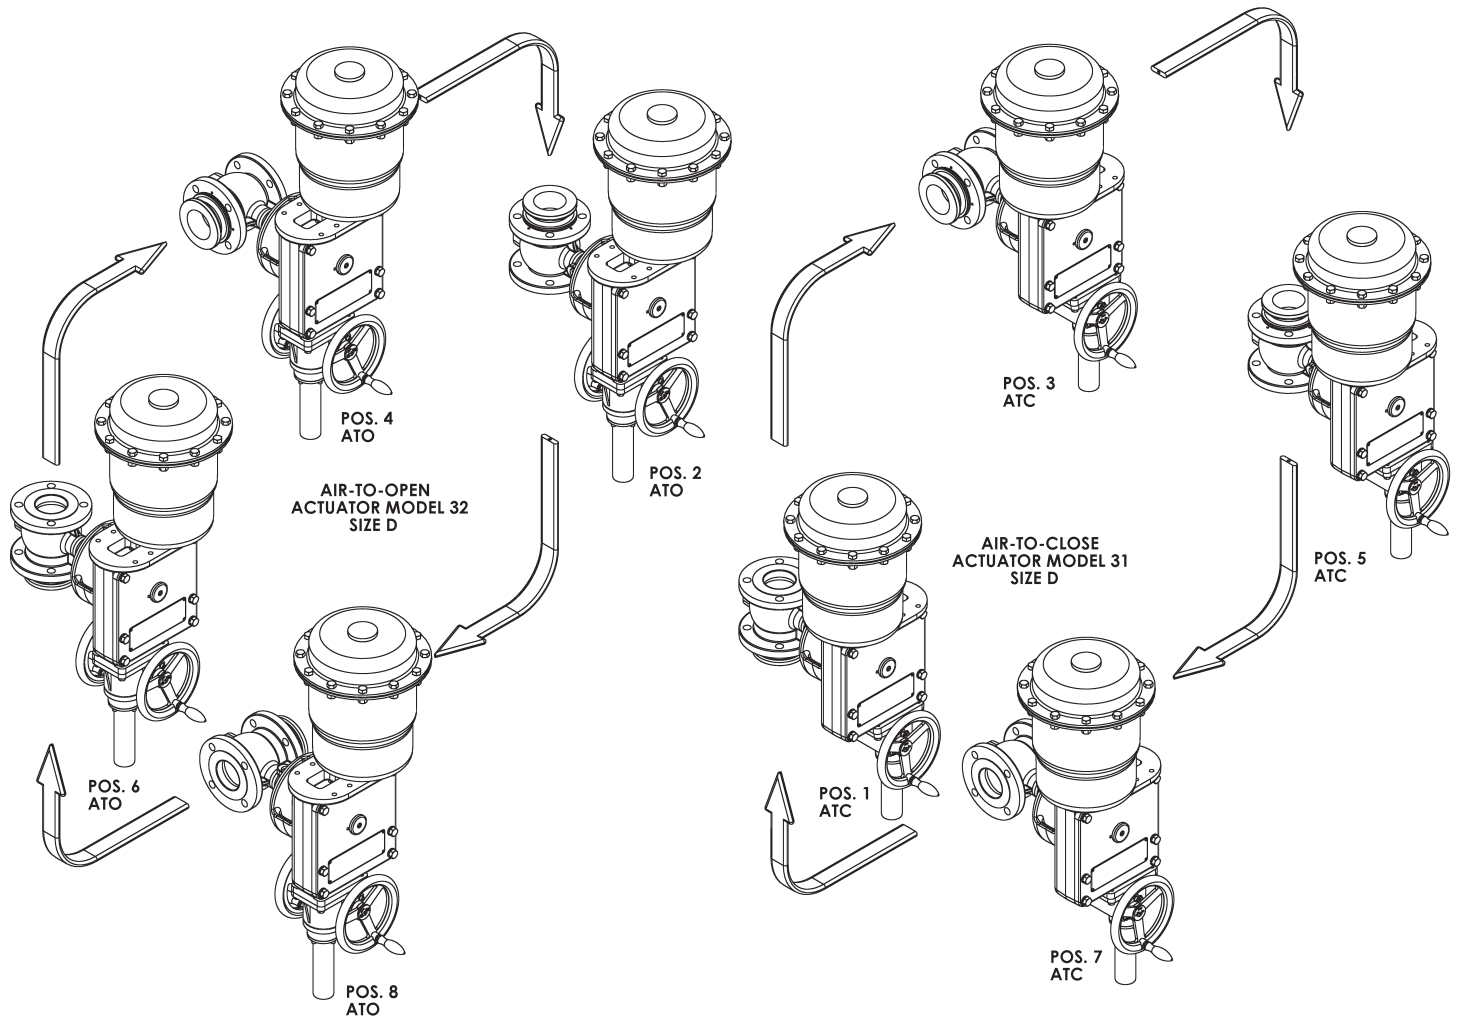

General Data

Body

body type: cast with integral bonnet
flow direction: flow to open
materials: carbon steel
316 stainless steel
317 stainless steel
body pressure rating: ANSI 150 or 300 depending on flange rating
end connections: flanged – bolts to ANSI Class 150 or 300 rated
flanges (1" – 12") (DN 25 – 300)

Trim

plug type: dual characterized, high capacity "V" contoured
segmented ball
material: 317 stainless steel, hard chrome plated
seat ring: MN-7, Standard Metal and Heavy Duty Metal
materials: MN-7 polymeric reinforced PTFE
316 stainless steel Standard Metal
Nitronic 60 Heavy Duty metal
retainer: 317 stainless steel
capacity: high capacity ball valve
flow characteristic: equal percentage
CV ratio: greater than 500:1

Actuators

Spring-Opposed Diaphragm – Model 33

size: AC 30 in² (194 cm²)
2.25" (57.2 mm) stroke
1"-2" valves (DN 25-50)
B 70 in² (452 cm²)
2.625" (66.5 mm) stroke
2"-4" valves (DN 50-100)
C 140 in² (903 cm²)
2.625" (66.5 mm) stroke
3"-12" valves (DN 80-300)
range: AC 7-15 psi
B 7-16 psi
C 9-16 psi
air connection: 1/4 NPT
yoke: cast iron
bearing: sealed radial ball
auxiliary handwheel: AC optional solid disk with locking nut
B rising stem push type
C rising stem push type
optional rising stem push type


Spring-Opposed Rolling Diaphragm – Model 31/32

size: D 60 in² (387 cm²)
4.00" (101.6 mm) stroke
3"-12" valves (DN 80-300)
range: D 12-28 psi
17-40 psi
29-68 psi
air connection: 1/4 NPT
yoke: cast iron
bearing: sealed radial ball
manual override: option jackscrew gear

General Data

Standard Actuator Characteristics

Valve Size		Shaft Diameter		Actuator										
				Model	Size		Spring Range		Effective Area		Actuator Stroke		Handwheel Diameter	
					Standard	Oversized	psi	bar	Sq. in.	Sq. cm	in.	mm	in.	mm
1	25	0.62	15.7	33	AC		7-15	.48-1.03	30	194	2.250	57.2	6.5	165
1-1/2	40	0.62	15.7	33	AC		7-15	.48-1.03	30	194	2.250	57.2	6.5	165
2	50	0.62	15.7	33	AC		7-15	.48-1.03	30	194	2.250	57.2	6.5	165
		0.62	23.7	33		B	7-16	.48-1.10	70	452	2.625	66.5	10	254
3	80	0.93	23.7	33	B		7-16	.48-1.10	70	452	2.625	66.5	10	254
		0.93	23.7	33		C	9-16	.62-1.10	140	903	2.625	66.5	10	254
4	100	0.93	23.7	33	B		7-16	.48-1.10	70	452	2.625	66.5	10	254
		0.93	23.7	33		C	9-16	.62-1.10	140	903	2.625	66.5	10	254
6	150	1.2	30.5	33	C		9-16	.62-1.10	140	903	2.625	66.5	10	254
		1.2	30.5	31/32		D	12-28	.83-1.93	60	387	4.000	101.6	8	203
		1.2	30.5	31/32		D	17-40	1.17-2.76	60	387	4.000	101.6	8	203
		1.2	30.5	31/32		D	29-68	2.00-4.69	60	387	4.000	101.6	8	203
8	200	1.2	30.5	33	C		9-16	.62-1.10	140	903	2.625	66.5	10	254
		1.2	30.5	31/32		D	12-28	.83-1.93	60	387	4.000	101.6	8	203
		1.2	30.5	31/32		D	17-40	1.17-2.76	60	387	4.000	101.6	8	203
		1.2	30.5	31/32		D	29-68	2.00-4.69	60	387	4.000	101.6	8	203
10	250	1.37	34.8	33	C		9-16	.62-1.10	140	903	2.625	66.5	10	254
		1.37	34.8	31/32		D	12-28	.83-1.93	60	387	4.000	101.6	8	203
		1.37	34.8	31/32		D	17-40	1.17-2.76	60	387	4.000	101.6	8	203
		1.37	34.8	31/32		D	29-68	2.00-4.69	60	387	4.000	101.6	8	203
12	300	1.37	34.8	33	C		9-16	.62-1.10	140	903	2.625	66.5	10	254
		1.37	34.8	31/32		D	12-28	.83-1.93	60	387	4.000	101.6	8	203
		1.37	34.8	31/32		D	17-40	1.17-2.76	60	387	4.000	101.6	8	203
		1.37	34.8	31/32		D	29-68	2.00-4.69	60	387	4.000	101.6	8	203

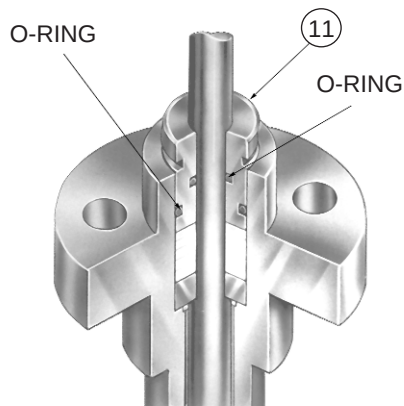

Provides long term reliable extremely low emission shaft seal performance. This economical solution to fugitive emissions won't compromise control performance and is suitable for use in environmentally sensitive applications.

† Factory Mutual certified report

Standard V-Max Packing Arrangement
EF Seal (Emission Free) Double O-Ring Seal Packing Follower
 Fugitive Emission Containment Package for Zero Leakage†

Temperature / Seat Leakage

Standard Metal Seal Ring Temperature Limitations



A strain hardened 316 stainless steel seal ring is an available option when the MN-7 Seal is not suitable. Seat leakage is per ANSI /FCI 70.2 Class IV. The metal seal ring can be used with either MN-7 lined bearings or the optional solid metal bearings. The fluid temperature is limited to 425°F (218°C) when using the MN-7 lined. A high temperature package consisting of metal seal ring, bearings and flexible graphite packing elevates fluid temperature limitations to 600°F (316°C) maximum or ANSI working pressure and temperature limitations. For use in lubricated service only.

Heavy Duty Metal Seal Ring (Bi-directional Flow)

A solid Heavy Duty Metal seat ring is available when the MN-7 or Standard Metal Seal ring is not suitable. The Heavy Duty Seat ring must be used with solid metal bearings. Fluid temperature is limited to 500°F (260°C) due to the material of the radial seal. Seat leakage is per ANSI/FCI 70.2 Class IV.

MN-7 Seal Ring Temperature Limitations

The standard MN-7 seal ring provides tight, ANSI/FCI 70.2 Class VI seat leakage. Pressure and temperature ratings of this design are limited as shown in the chart below as well as those shown in the corresponding pressure drop tables.

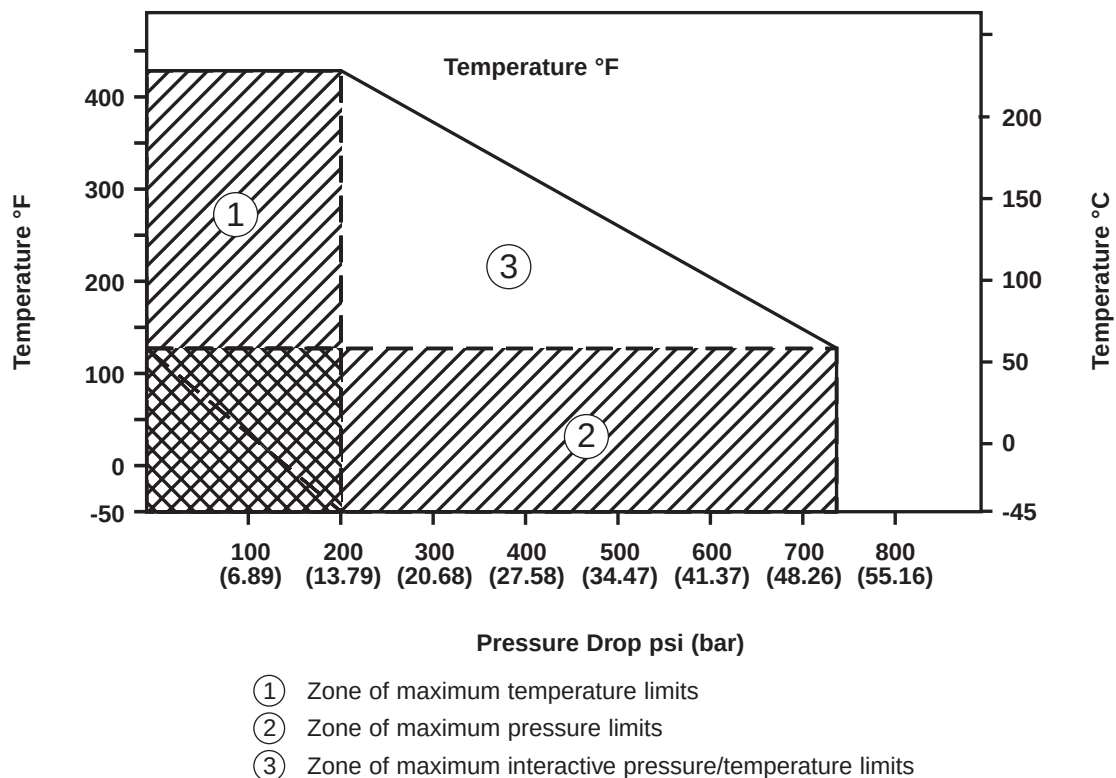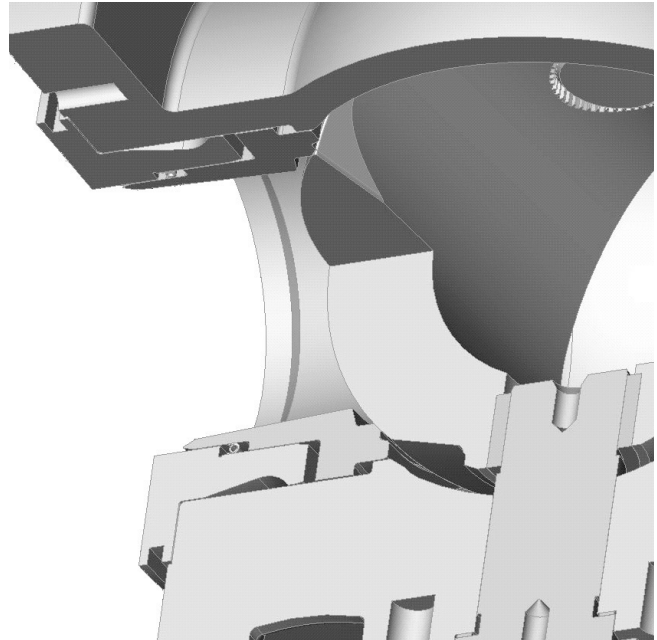

* For higher temperatures and other materials, consult Masoneilan

C_V and F_L Versus Travel


Flow Direction: Flow to Open

Flow Characteristics: Equal Percentage

ANSI Class: 150 and 300

Sizes: 1" through 12" (DN 25-300)

Percent (%) of Max. Opening		10	15	20	30	40	50	60	70	80	90	100
Percent (%) of Max. C _V		0.20%	0.98%	2.15%	5.2%	9.5%	15.0%	22.0%	31.5%	46.5%	72.0%	100.0%
F _L		0.92	0.91	0.90	0.89	0.87	0.83	0.80	0.76	0.72	0.67	0.60
Valve Size		Rated C _V										
in	DN											
1	25	0.11	0.54	1.2	2.9	5.2	8.3	12.1	17	26	40	55
1-1/2	40	0.25	1.2	2.7	6.5	12	19	28	39	58	90	125
2	50	0.34	1.7	3.7	8.8	16	26	37	54	79	122	170
3	80	0.88	4.3	9.5	23	42	66	97	139	205	317	440
4	100	1.48	7.3	16	38	70	111	163	233	344	533	740
6	150	2.50	12	27	65	119	188	275	394	581	900	1250
8	200	3.72	18	40	97	177	279	409	586	865	1339	1860
10	250	6.0	30	65	157	287	453	664	951	1404	2174	3020
12	300	8.8	43	95	229	418	660	968	1386	2046	3168	4400

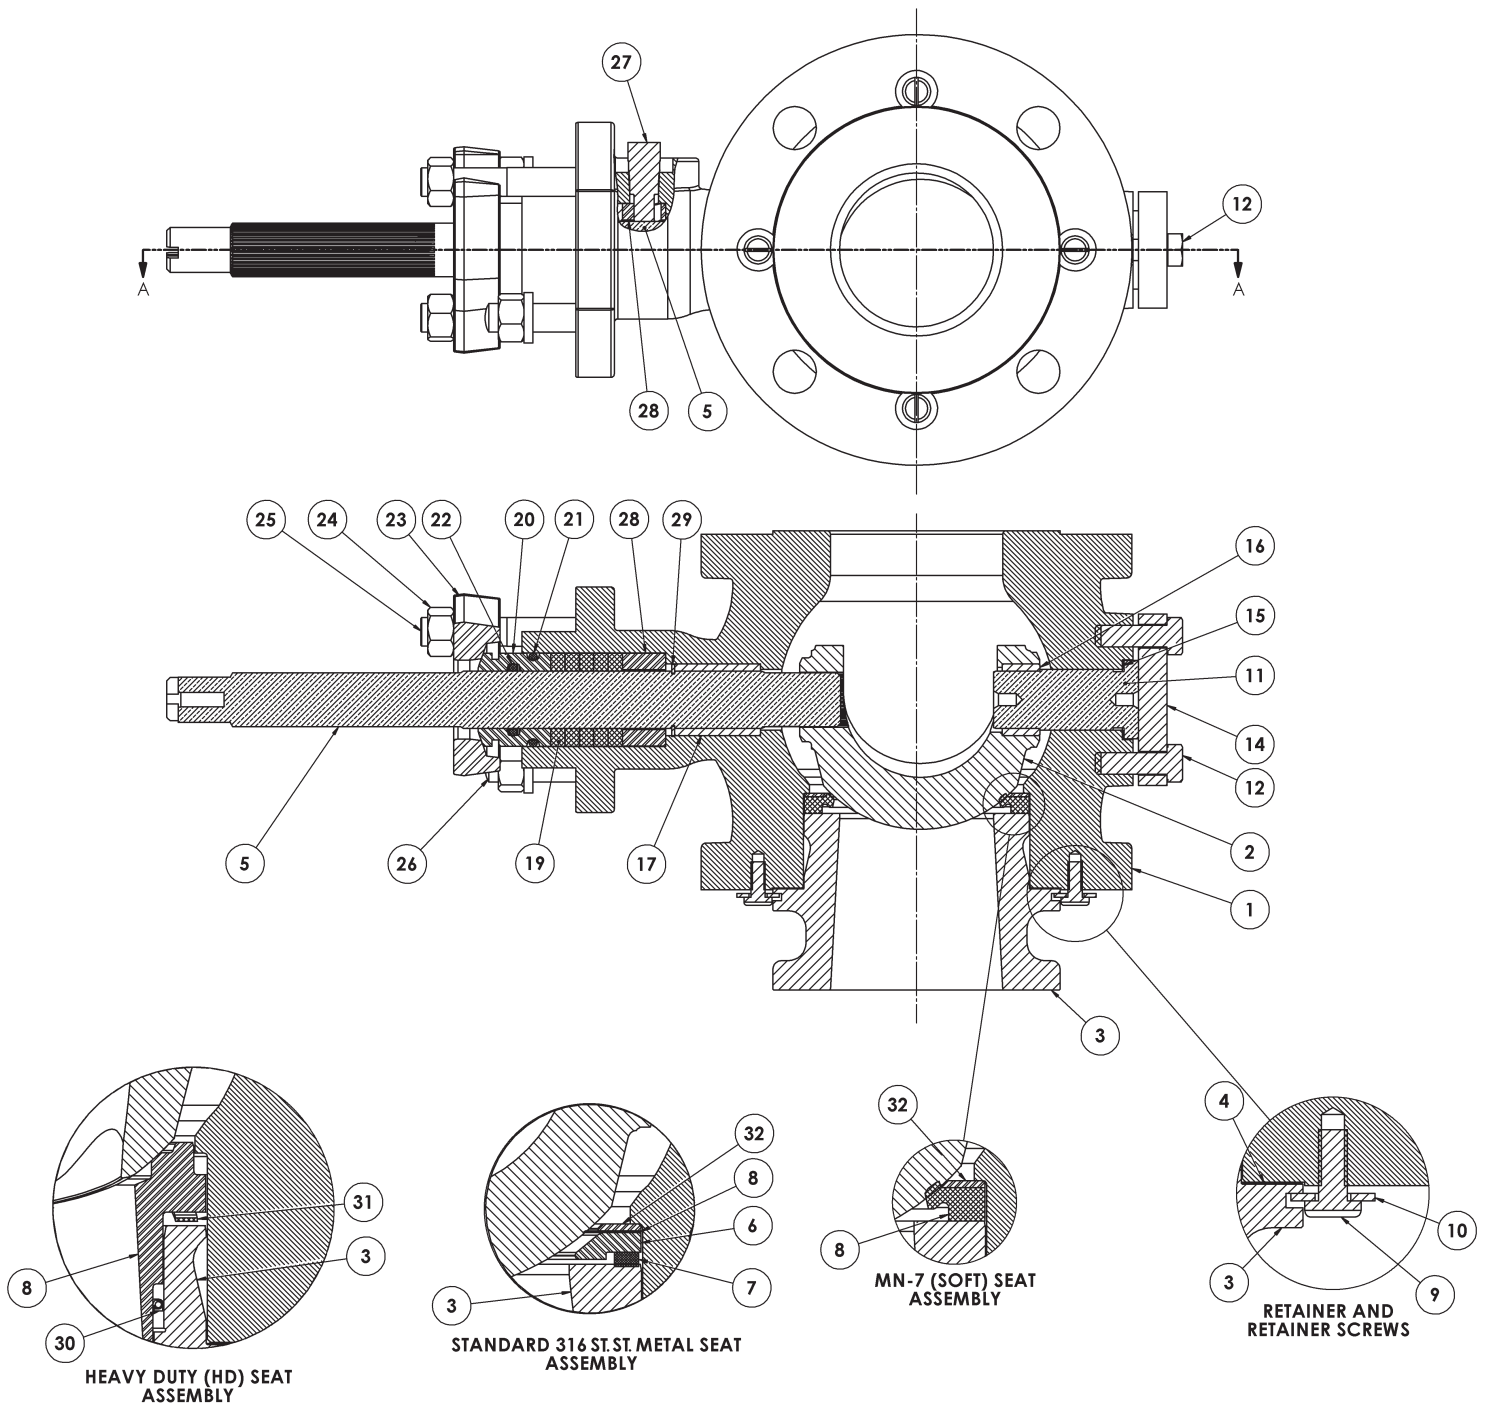

Materials of Construction

Carbon Steel Construction

Ref. No	Temperature Range	-20°F -29°C	+425°F +218°C	+450°F +232°C	+500°F +260°C	+600°F +316°C
	Description	Standard Materials				
1	Body Flanged	ASTM A216 Gr WCB Carbon Steel				
2	Ball Plug	ASTM A351 Gr CG8M Type 317, Hard Chromium Plated				
3	Retainer Standard (ISA S75.04)	ASTM A351 Gr CG8M Type 317				
	Retainer Extended (ANSI B16.10)					
4	Gasket (Retainer Body)	Flexible Graphite				
5	Stem Shaft	ASTM A564 Gr 630 H1075				
		Nitronic 50				
6	Backup Ring (Flat Metal Seat)	ASTM A240 Type 317L Stainless Steel				
7	Gasket (Flat Metal Seat)	316 Stainless Steel / Flexible Graphite				
8	Seat Ring Flexible Metal	ASTM A66 1/4 Hard Strain Hardened 316 Stainless Steel Sheet				
	Seat Ring	MN-7				
	Seat Ring Heavy Duty Rigid	Nitronic 60 Stainless Steel				
9	Slot Button Head Screw	Carbon Steel Plated				
10	Flat Washer	Carbon Steel Plated				
11	Pin Shaft	ASTM A564 Gr 630 H1075				
		Nitronic 50				
12	Cap Screw, End Flange	ASTM A193 Gr B8				
14	End Flange	ASTM A36 Plated				
15	Gasket Pin Shaft	Nitrile Bound Acrylic				
16	Lower Bushing	316 Stainless Steel / MN-7 Lined				
		Stellite				
17	Upper Bushing	316 Stainless Steel / MN-7 Lined				
		Stellite				
19	Packing Set	Crane 285K - TFE Aramid Core				
		Flexible Graphite				
20	Packing Follower	ASTM A582 Type 303 St. St.				
21	O-ring	Viton				
22	O-ring	Viton				
23	Packing Box Flange	ASTM A216 Gr WCC Plated				
24	Nut, Packing Flange Stud	ASTM A194 Gr 8				
25	Stud, Packing Flange	Alloy Steel ASTM A193 Gr B8				
26	Stud, Bonnet	Alloy Steel ASTM A193 Gr B8				
27	Safety Pin	ASTM A479 Type 316				
28	Packing Adapter	ASTM A479 Type 316				
29	Shaft Ring	ASTM A564 Gr 632				
30	Radial Seal, HD Seat	GFP Graphite Fiber Reinforced PTFE Seal, Hastelloy C276 Spring				
31	Wave Spring, HD Seat	Inconel X-750 Material (AM-5699) Precipitation Hardened				
32	Seat Support Ring, Downstream	ASTM A240 Type 317L Stainless Steel				
Ref. No	Temperature Range	-20°F -29°C	+425°F +218°C	+450°F +232°C	+500°F +260°C	+600°F +316°C

Materials of Construction

Stainless Steel Construction

Ref. No	Temperature Range	-50°F -46°C	+425°F +218°C	+450°F +232°C	+500°F +260°C	+600°F +316°C
	Description	Standard Materials				
1	Body Flanged	ASTM A351 Gr CG8M Type 317				
2	Ball Plug	ASTM A351 Gr CG8M Type 317, Hard Chromium Plated				
3	Retainer Standard (ISA S75.04)	ASTM A351 Gr CG8M Type 317				
	Retainer Extended (ANSI B16.10)					
4	Gasket (Retainer Body)	Flexible Graphite				
5	Stem Shaft	Nitronic 50 (Standard)				
		ASTM A564 Gr 630 H1075 (Optional)				
6	Backup Ring (Flat Metal Seat)	ASTM A240 Type 317L Stainless Steel				
7	Gasket (Flat Metal Seat)	316 Stainless Steel / Flexible Graphite				
8	Seat Ring Flexible Metal	ASTM A66 1/4 Hard Strain Hardened 316 Stainless Steel Sheet				
	Seat Ring	MN-7				
	Seat Ring Heavy Duty Rigid	Nitronic 60 Stainless Steel				
9	Slot Button Head Screw	Carbon Steel Plated				
10	Flat Washer	Carbon Steel Plated				
11	Pin Shaft	Nitronic 50 (Standard)				
		ASTM A564 Gr 630 H1075 (Optional)				
12	Cap Screw, End Flange	ASTM A193 Gr B8				
14	End Flange	ASTM A36 Plated				
15	Gasket Pin Shaft	Nitrile Bound Acrylic				
16	Lower Bushing	316 Stainless Steel / MN-7 Lined				
		Stellite				
17	Upper Bushing	316 Stainless Steel / MN-7 Lined				
		Stellite				
19	Packing Set	Crane 285K - TFE Aramid Core				
		Flexible Graphite				
20	Packing Follower	ASTM A582 Type 303 St. St.				
21	O-ring	Viton				
22	O-ring	Viton				
23	Packing Box Flange	ASTM A216 Gr WCC Plated				
24	Nut, Packing Flange Stud	ASTM A194 Gr 8				
25	Stud, Packing Flange	Alloy Steel ASTM A193 Gr B8				
26	Stud, Bonnet	Alloy Steel ASTM A193 Gr B8				
27	Safety Pin	ASTM A479 Type 316				
28	Packing Adapter	ASTM A479 Type 316				
29	Shaft Ring	ASTM A564 Gr 632				
30	Radial Seal, HD Seat	GFP Graphite Fiber Reinforced PTFE Seal, Hastelloy C276 Spring				
31	Wave Spring, HD Seat	Inconel X-750 Material (AMS 5699) Precipitation Hardened				
32	Seat Support Ring, Downstream	317 Stainless Steel				
Ref. No	Temperature Range	-50°F -46°C	+425°F +218°C	+450°F +232°C	+500°F +260°C	+600°F +316°C


Materials of Construction

Carbon Steel NACE Construction - Complies with NACE MR0103-2003

Ref. No	Temperature Range	-50°F -46°C	-20°F -29°C	+425°F +218°C	+450°F +232°C	+500°F +260°C	+600°F +316°C
	Description	Standard Materials					
1	Body Flanged		ASTM A216 Gr WCB Carbon Steel				
		ASTM A351 Gr CG8M Type 317					
2	Ball Plug	ASTM A351 Gr CG8M Type 317, Hard Chromium Plated					
3	Retainer Standard (ISA S75.04)	ASTM A351 Gr CG8M Type 317					
	Retainer Extended (ANSI B16.10)						
4	Gasket (Retainer Body)	Flexible Graphite					
5	Stem Shaft	Nitronic 50					
6	Backup Ring (Flat Metal Seat)	ASTM A240 Type 317L Stainless Steel					
7	Gasket (Flat Metal Seat)	316 Stainless Steel / Flexible Graphite					
8	Seat Ring Flexible Metal	ASTM A66 1/4 Hard Strain Hardened 316 Stainless Steel Sheet					
	Seat Ring	MN-7					
	Seat Ring Heavy Duty Rigid	Nitronic 50 Stainless Steel					
9	Slot Button Head Screw	Carbon Steel Plated					
10	Flat Washer	Carbon Steel Plated					
11	Pin Shaft	Nitronic 50					
12	Cap Screw, End Flange	ASTM A193 Gr B8					
14	End Flange	ASTM A36 Plated					
15	Gasket Pin Shaft	Nitrile Bound Acrylic					
16	Lower Bushing	316 Stainless Steel / MN-7 Lined					
		Stellite					
17	Upper Bushing	316 Stainless Steel / MN-7 Lined					
		Stellite					
19	Packing Set	Crane 285K - TFE Aramid Core					
		Flexible Graphite					
20	Packing Follower	ASTM A582 Type 303 St. St.					
21	O-ring	Viton					
22	O-ring	Viton					
23	Packing Box Flange	ASTM A216 Gr WCC Plated					
24	Nut, Packing Flange Stud	ASTM A194 Gr 8					
25	Stud, Packing Flange	Alloy Steel ASTM A193 Gr B8					
26	Stud, Bonnet	Alloy Steel ASTM A193 Gr B8					
27	Safety Pin	ASTM A479 Type 316					
28	Packing Adapter	ASTM A479 Type 316					
29	Shaft Ring	ASTM A564 Gr 632					
30	Radial Seal, HD Seat	GFP Graphite Fiber Reinforced PTFE Seal, Hastelloy C276 Spring					
31	Wave Spring, HD Seat	Inconel X-750 Material (AMS 5699) Precipitation Hardened					
32	Seat Support Ring, Downstream	ASTM A240 Type 317L Stainless Steel					
Ref. No	Temperature Range	-50°F -46°C	-20°F -29°C	+425°F +218°C	+450°F +232°C	+500°F +260°C	+600°F +316°C

Dimensions

Actuator Model 33, Size AC – inches [millimeters]

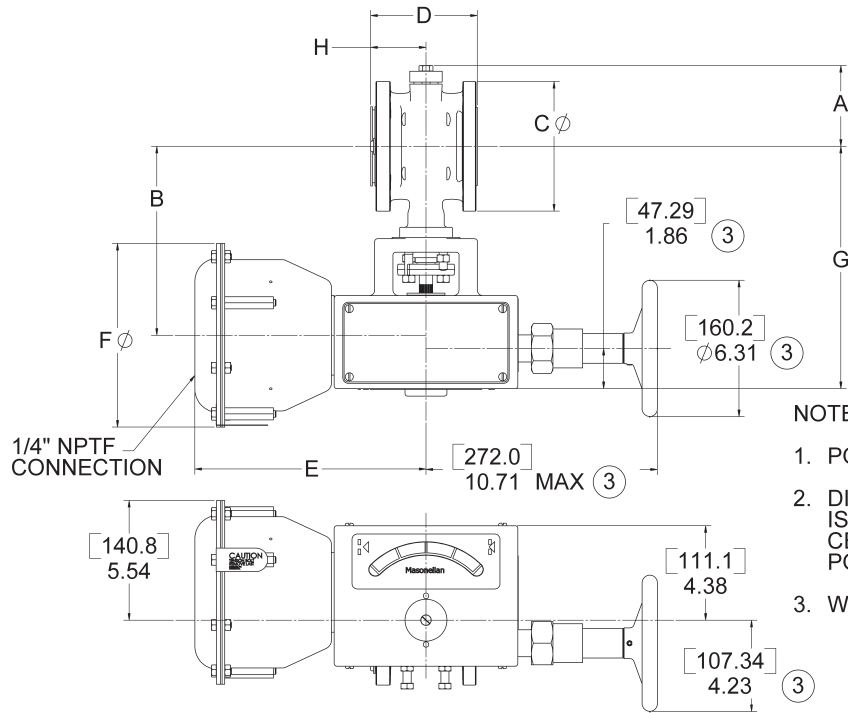


NOTES:

1. POSITION 2 ORIENTATION SHOWN.
2. DIMENSION 10.71 [272.0] TO HW IS ON OPPOSITE SIDE OF CENTERLINE FOR AIR-TO-CLOSE POSITIONS.
3. WHEN HANDWHEEL IS SPECIFIED.

Actuator Model 33, Size B and C – inches [millimeters]

NOTES:

1. POSITION 4 ORIENTATION SHOWN.
2. DIMENSION 13.73 [348.07] TO HW IS ON OPPOSITE SIDE OF CENTERLINE FOR AIR-TO-CLOSE POSITIONS.
3. WHEN HANDWHEEL IS SPECIFIED.

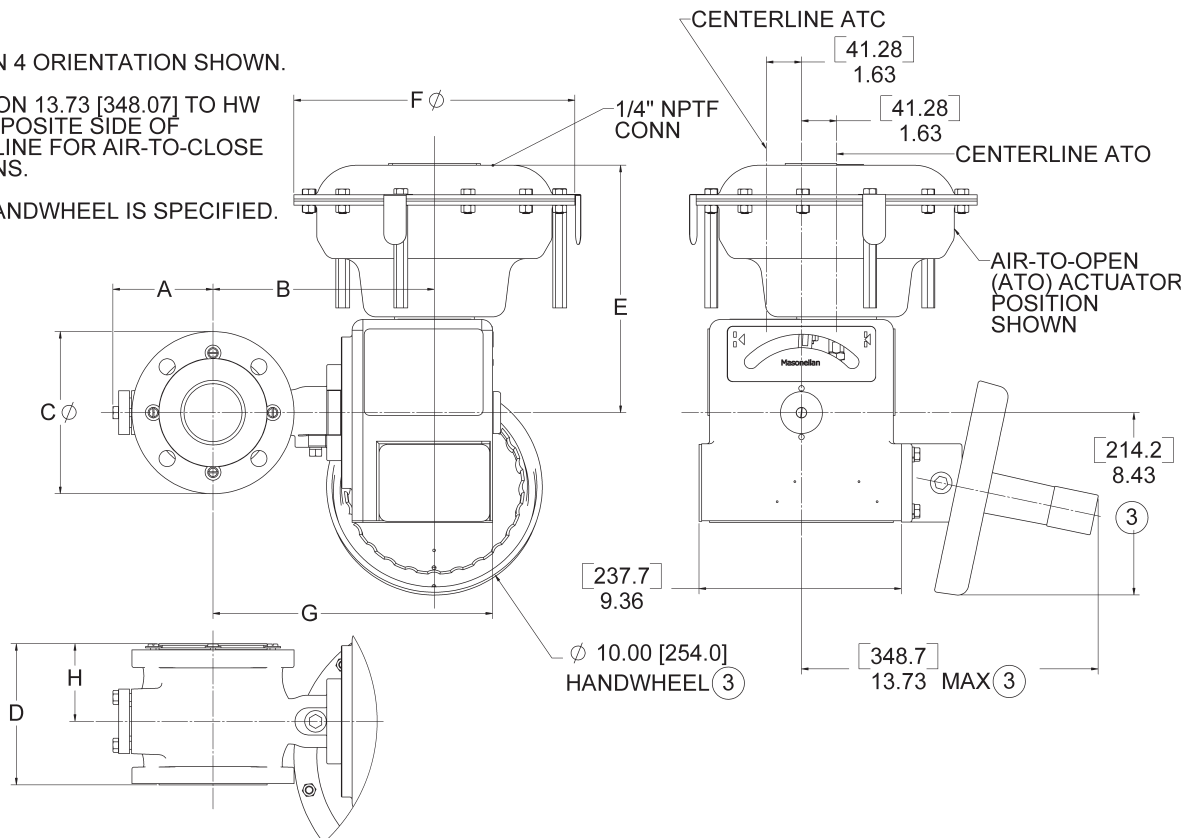

Dimensions

Actuator Model 33, Sizes AC, B and C (inches)

Valve Size		Actuator Size		A		B	C ⁽¹⁾		Face-to-Face D		E	F	G	Center-to-Face H	
in.	DN	Size	Sq. In.	ANSI 150	ANSI 300		ANSI 150	ANSI 300	Standard ISA S75.04 ⁽²⁾	Optional ASME B16.10 ⁽³⁾				Standard ISA S75.04 ⁽²⁾	Optional ASME B16.10 ⁽³⁾
1	25	AC	30	2.74	2.74	8.06	4.25	4.88	4.00	5.00	10.70	8.50	10.53	2.12	3.12
1.5	40	AC	30	3.13	4.08	8.33	5.00	6.12	4.47	6.49	10.70	8.50	10.80	2.43	4.46
2	50	AC	30	3.92	5.05	8.74	6.00	6.50	4.93	7.01	10.70	8.50	11.21	2.56	4.64
		B	70	3.92	5.05	8.52	6.00	6.50	4.93	7.01	11.45	13.00	11.21	2.56	4.64
3	80	B	70	4.64	4.64	10.24	7.50	8.25	6.54	8.00	11.45	13.00	12.93	3.59	5.06
		C	140	4.64	4.64	10.24	7.50	8.25	6.54	8.00	15.07	17.50	12.93	3.59	5.06
4	100	B	70	5.48	5.48	10.87	9.00	10.00	7.61	9.00	11.45	13.00	13.56	3.95	5.50
		C	140	5.48	5.48	10.87	9.00	10.00	7.61	9.00	15.07	17.50	13.56	3.95	5.50
6	150	C	140	6.76	6.76	12.09	11.00	12.50	8.99	10.52	15.07	17.50	14.78	4.85	6.37
8	200	C	140	7.88	7.88	13.81	13.50	15.00	9.59	11.50	15.07	17.50	16.50	5.03	6.95
10	250	C	140	9.46	9.46	15.75	16.00	17.50	11.69	13.02	15.07	17.50	18.44	6.09	7.42
12	300	C	140	10.63	10.63	16.92	19.00	20.50	13.33	14.00	15.07	17.50	19.61	7.52	8.19

Actuator Model 33, Sizes AC, B and C (millimeters)


Valve Size		Actuator Size		A		B	C ⁽¹⁾		Face-to-Face D		E	F	G	Center-to-Face H	
in.	DN	Size	Sq. cm	ANSI 150	ANSI 300		ANSI 150	ANSI 300	Standard ISA S75.04 ⁽²⁾	Optional ASME B16.10 ⁽³⁾				Standard ISA S75.04 ⁽²⁾	Optional ASME B16.10 ⁽³⁾
1	25	AC	194	69.60	69.60	204.72	107.95	123.95	101.60	127.00	271.78	215.90	267.46	53.85	79.25
1.5	40	AC	194	79.50	103.63	211.58	127.00	155.45	113.54	164.85	271.78	215.90	274.32	61.72	113.28
2	50	AC	194	99.57	128.27	222.00	152.40	165.10	125.22	178.05	271.78	215.90	284.73	65.02	117.86
		B	452	99.57	128.27	216.41	152.40	165.10	125.22	178.05	290.83	330.20	284.73	65.02	117.86
3	80	B	452	117.86	117.86	260.10	190.50	209.55	166.12	203.20	290.83	330.20	328.42	91.19	128.52
		C	903	117.86	117.86	260.10	190.50	209.55	166.12	203.20	382.78	444.50	328.42	91.19	128.52
4	100	B	452	139.19	139.19	276.10	228.60	254.00	193.29	228.60	290.83	330.20	344.42	100.33	139.70
		C	903	139.19	139.19	276.10	228.60	254.00	193.29	228.60	382.78	444.50	344.42	100.33	139.70
6	150	C	903	171.70	171.70	307.09	279.40	317.50	228.35	267.21	382.78	444.50	375.41	123.19	161.80
8	200	C	903	200.15	200.15	350.77	342.90	381.00	243.59	292.10	382.78	444.50	419.10	127.76	176.53
10	250	C	903	240.28	240.28	400.05	406.40	444.50	296.93	330.71	382.78	444.50	468.38	154.69	188.47
12	300	C	903	270.00	270.00	429.77	482.60	520.70	338.58	355.60	382.78	444.50	498.09	191.01	208.03

Notes:

1. Conforms to ASME/ANSI Standard B16.5 - 1996 "Pipe Flanges and Flange Fittings"
2. Conforms to ISA Standard S75.04
3. Conforms to ASME Standard B16.10 - 1992 (formerly ANSI Standard B16.10 - 1973)
Short Pattern Ball. Available for ANSI 150 Class Valves ONLY

Dimensions

Actuator Model 31/32, Size D – inches [millimeters]

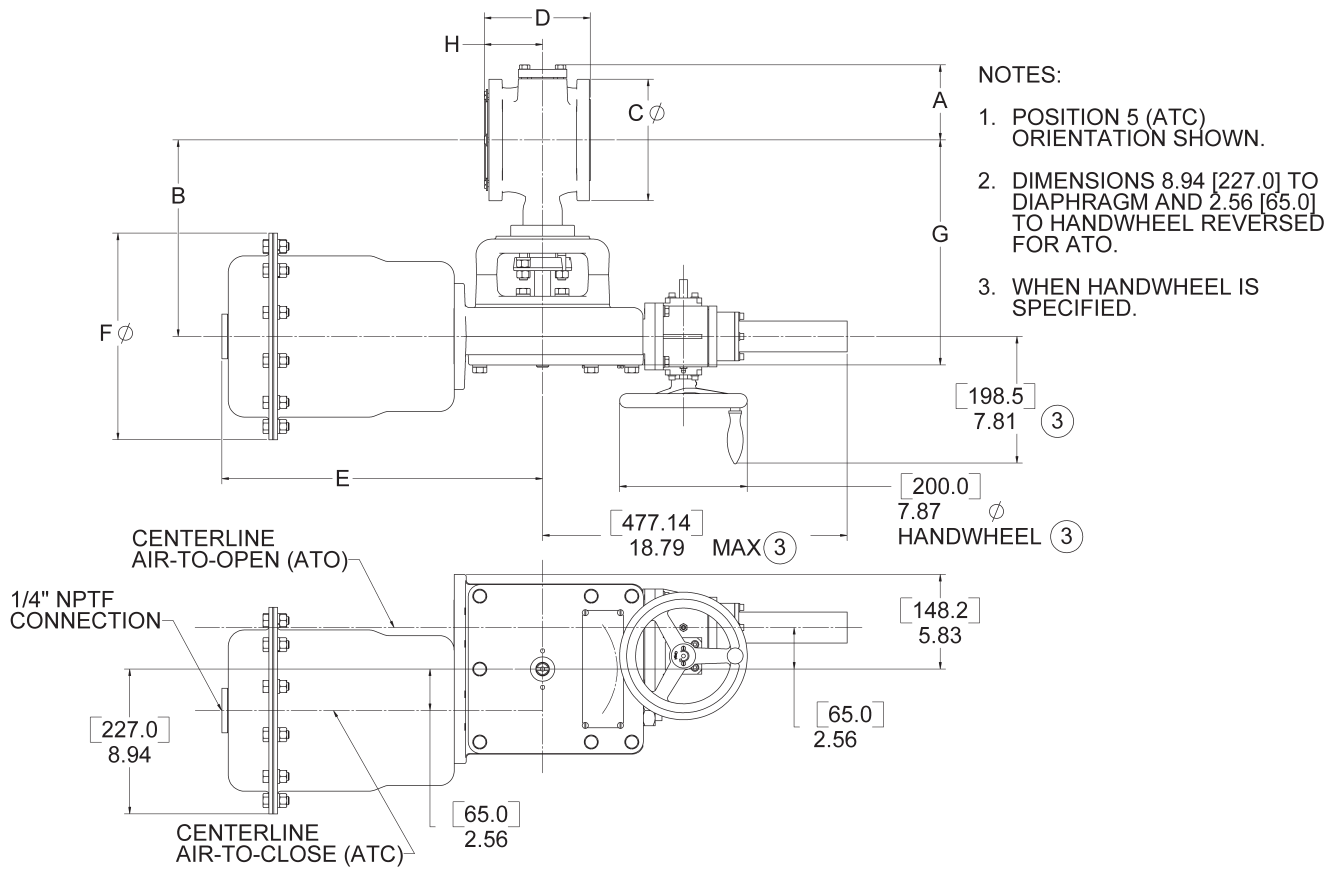

Dimensions

Actuator Model 31/32, Size D (inches)

Valve Size		Actuator Size		A		B	C ⁽¹⁾		Face-to-Face D		E	F	G	Center-to-Face H	
in.	DN	Size	Sq. In.	ANSI 150	ANSI 300		ANSI 150	ANSI 300	Standard ISA S75.04 ⁽²⁾	Optional ASME B16.10 ⁽³⁾				Standard ISA S75.04 ⁽²⁾	Optional ASME B16.10 ⁽³⁾
3	80	D	60	4.64	4.64	12.12	7.50	8.25	6.54	8.00	19.78	12.75	13.88	3.59	5.06
4	100	D	60	5.48	5.48	12.75	9.00	10.00	7.61	9.00	19.78	12.75	14.51	3.95	5.50
6	150	D	60	6.76	6.76	14.06	11.00	12.50	8.99	10.52	19.78	12.75	15.82	4.85	6.37
8	200	D	60	7.88	7.88	15.69	13.50	15.00	9.59	11.50	19.78	12.75	17.45	5.03	6.95
10	250	D	60	9.46	9.46	17.63	16.00	17.50	11.69	13.02	19.78	12.75	19.39	6.09	7.42
12	300	D	60	10.63	10.63	18.80	19.00	20.50	13.33	14.00	19.78	12.75	20.56	7.52	8.19

Actuator Model 31/32, Size D (millimeters)

Valve Size		Actuator Size		A		B	C ⁽¹⁾		Face-to-Face D		E	F	G	Center-to-Face H	
in.	DN	Size	Sq. cm	ANSI 150	ANSI 300		ANSI 150	ANSI 300	Standard ISA S75.04 ⁽²⁾	Optional ASME B16.10 ⁽³⁾				Standard ISA S75.04 ⁽²⁾	Optional ASME B16.10 ⁽³⁾
3	80	D	387	117.86	117.86	307.85	190.50	209.55	166.12	203.20	502.41	323.85	352.55	91.19	128.52
4	100	D	387	139.19	139.19	323.85	228.60	254.00	193.29	228.60	502.41	323.85	368.55	100.33	139.70
6	150	D	387	171.70	171.70	357.12	279.40	317.50	228.35	267.21	502.41	323.85	401.83	123.19	161.80
8	200	D	387	200.15	200.15	398.53	342.90	381.00	243.59	292.10	502.41	323.85	443.23	127.76	176.53
10	250	D	387	240.28	240.28	447.80	406.40	444.50	296.93	330.71	502.41	323.85	492.51	154.69	188.47
12	300	D	387	270.00	270.00	477.52	482.60	520.70	338.58	355.60	502.41	323.85	522.22	191.01	208.03

Notes:

1. Conforms to ASME/ANSI Standard B16.5 - 1996 "Pipe Flanges and Flange Fittings"
2. Conforms to ISA Standard S75.04
3. Conforms to ASME Standard B16.10 - 1992 (formerly ANSI Standard B16.10 - 1973)
Short Pattern Ball. Available for ANSI 150 Class Valves ONLY

Assembly Weights

Valve Size		Actuator		Valve and Actuator Assembly Weights (without Manual Override)						Manual Override	
				Standard ISA S75.04 Face-to-Face				Optional ASME B16.10 Face-to-Face			
				ANSI Class 150 Flanged		ANSI Class 300 Flanged		ANSI Class 150 Flanged ONLY		Add to Valve / Actuator Weight	
in.	DN	Model	Size	lbs	Kg	lbs	Kg	lbs	Kg	lbs	Kg
1	25	33	AC	50	22	53	24	50	23	7	3
1.5	40	33	AC	54	24	61	27	56	25	7	3
2	50	33	AC	60	27	81	37	63	29	7	3
		33	B	101	46	122	55	103	47	27	12
3	80	33	B	124	56	134	61	128	58	27	12
		33	C	182	82	192	87	186	84	27	12
		31/32	D	227	103	237	107	231	105	12	5
4	100	33	B	147	67	166	75	152	69	27	12
		33	C	205	93	224	101	210	95	27	12
		31/32	D	250	113	269	122	255	116	12	5
6	150	33	C	250	114	288	131	260	118	27	12
		31/32	D	295	134	333	151	305	138	12	5
8	200	33	C	303	137	359	163	326	148	27	12
		31/32	D	348	158	404	183	371	168	12	5
10	250	33	C	393	178	416	189	480	217	27	12
		31/32	D	438	199	461	209	525	238	12	5
12	300	33	C	520	236	540	245	642	291	27	12
		31/32	D	565	256	585	265	687	312	12	5

Notes

DIRECT SALES OFFICE LOCATIONS

BELGIUM

Phone: +32-2-344-0970
Fax: +32-2-344-1123

BRAZIL

Phone: 55-11-2146-3600
Fax: 55-11-2146-3610

CANADA

Ontario
Phone: 905-335-3529
Fax: 905-336-7628

CHINA

Phone: +86-10-8486-4515
Fax: +86-10-8486-5305

FRANCE

Courbevoie
Phone: +33-1-4904-9000
Fax: +33-1-4904-9010

GERMANY

Viersen
Phone: +49-2162-8170-0
Fax: +49-2162-8170-280

Frankfurt
Phone: +49-69-439350
Fax: +49-69-4970802

INDIA

Mumbai
Phone: +91-22- 8354790
Fax: +91-22-8354791

New Delhi
Phone: +91-11-2-6164175
Fax: +91-11-5-1659635

ITALY

Phone: +39-081-7892-111
Fax: +39-081-7892-208

JAPAN

Chiba
Phone: +81-43-297-9222
Fax: +81-43-299-1115

KOREA

Phone: +82-2-2274-0748
Fax: +82-2-2274-0794

KUWAIT

Phone: +965-9061157
Fax: +965-3987879

MALAYSIA

Phone: +60-3-2161-0322
Fax: +60-3-2163-6312

MEXICO

Phone: 52-5-310-9863
Fax: 52-5-310-5584

THE NETHERLANDS

Phone: +31-10-438-4122
Fax: +31-10-438-4443

RUSSIA

Veliky Novgorod
Phone: +7-8162-15-7898
Fax: +7-8162-15-7921

Moscow
Phone: +7 495-585-1276
Fax: +7 495-585-1279

SAUDI ARABIA

Phone: +966-3-341-0278
Fax: +966-3-341-7624

SINGAPORE

Phone: +65-6-6861-6100
Fax: +65-6-6861-7172

SOUTH AFRICA

Phone: +27-11-452-1550
Fax: +27-11-452-6542

SOUTH & CENTRAL AMERICA AND THE CARIBBEAN

Phone: 832-590-2303
Fax: 832-590-2529

SPAIN

Phone: +34-93-652-6430
Fax: +34-93-652-6444

UNITED ARAB EMIRATES

Phone: +971-4-8838-752
Fax: +971-4-8838-038

UNITED KINGDOM

Skelmersdale,
Phone: +44-1695-52600
Fax: +44-1695-52601

Uxbridge
Phone: +44-1895-454-900
Fax: +44-1895-454-919

UNITED STATES

Massachusetts
Phone: 508-586-4600
Fax: 508-427-8971

Corpus Christi, Texas
Phone: 361-881-8182
Fax: 361-881-8246

Dresser Direct
Deer Park, Texas
Phone: 281-884-1000
Fax: 281-884-1010

(Contractor Sales)
Houston, Texas
Phone: 832-590-2303
Fax: 832-590-2529

California
Phone: 562-941-7610
Fax: 562-941-7810

Aftermarket Value Services

Dresser - Masoneilan, a leading manufacturer of automated process control solutions, offers world-class global aftermarket services. Consistent and high quality services executed through a network of fully authorized and certified third party service centers, as well as company owned facilities include: Valve Repair, Technical Training, Field Support, Spare Parts Supply, Complete Equipment Replacement and Comprehensive Diagnostics.

About Dresser, Inc.

Dresser, Inc. is a leader in providing highly engineered infrastructure products for the global energy industry. The company has leading positions in a broad portfolio of products including valves, actuators, meters, switches, regulators, piping products, natural gas-fueled engines, retail fuel dispensers and associated retail point of sale systems and air and gas handling equipment.

Leading brand names within the Dresser portfolio include Dresser Wayne® retail fueling systems, Waukesha® natural gas-fired engines, Masoneilan® control valves, Mooney® regulators, Consolidated® pressure relief valves, and Roots® blowers and rotary gas meters. It has manufacturing and customer service facilities located strategically worldwide and a sales presence in more than 100 countries. The company's website can be accessed at www.dresser.com.

Dresser Masoneilan

85 Bodwell Street
Avon, MA 02322-1190
Tele: 508-586-4600 / Fax: 508-941-5497
Email: sales@masoneilan.com

© 2008 Dresser, Inc. All rights reserved.

Dresser Masoneilan

With its breadth of products, unequaled global presence and advanced process control expertise, Dresser Masoneilan is uniquely positioned to be the leading provider of flexible, best fit control valve solutions.

Supported by an integrated network of sales offices, Dresser Masoneilan provides the widest range of valve solutions and services for virtually every process control application.



www.dresser.com